

구매(용역) 사유서

과 제 명	4톤급 지게차 총합 열관리 시스템 및 소음저감 기술개발
구매품목	건설기계 어태치먼트 변위 계측 데이터 로거 - RPM, Velocity, Displacement, Event counting, Voltage, and ETC. - CAN FD nodes communication - Connecting to imc CANSAS series
납품장소	건품연 본관 319호 에코에너지연구그룹
구매용도	건설기계/장비의 실차 CAN 데이터 및 어태치먼트등의 속도, 위치, 변형, 변위 데이터를 실시간으로 계측, 저장하기 위함. 특정 조건 및 운행 상태에서의 부품별, 차량별 동적 특성을 파악하기 위함.
사 유	1) 지게차 및 리프트 운행에 대한 시험 평가 사이클의 정규화 필요 2) 각 요소 부품별 연관 기여도 분석

rev. 1	장비 사양서
1/1	건설기계 변위 계측 데이터 로거
1.	장비 명 : 변위 계측 데이터 로거
2.	장비 규격
가.	인터페이스
	- CAN 통신
	- 실시간 신호 계측 및 자동 제어
	- 입력신호 (회전수, 속도, 각도, 시간, 위치, 카운터 등)
	- 디지털 입/출력
	- 아날로그 출력
	- 데이터 저장
	- PC 연동 및 독립 제어
	- 무선 통신 (WiFi) 및 WLAN 어댑터
나.	하드웨어 사양
	- 아날로그 출력 : 4 채널
	- 디지털 입/출력 : 8 채널/ 8 채널
	- 엔코더 : 4 채널
	- CAN FD : 2 포트
	- 샘플링 속도 : 100 kHz
	- 분해능 : 16 bit
	- 정확도 : 최대 0.06 %
다.	기타
	- PC와 무선 데이터 송수신
	- 내부 UPS 장착
	- imc CANSAS 모듈 연계
	- imc FAMOS 연계 제어, 분석

imc C-SERIES: CS-7008-FD

Universal and powerful compact measurement system



device type: CS-7008-FD, 8 analog measurement inputs

The CS-7008 model of the imc C-SERIES is an 8-channel universal measurement system, ideal for direct connection of bridge type sensors and strain gauges, voltage- and current signals, thermocouples and PT100.

Additional pulse counter inputs support direct measurement of RPM, velocity or displacement or event counting. Two integrated CAN FD nodes allows communication with control units (ECUs) and acquisition of vehicle or machine data, CAN based sensors or additional CAN measurement modules of the imc CANSAS series.

imc C-SERIES - complete, compact and portable measurement devices

The imc C-SERIES is a family of device models each having a fixed hardware configuration. These measurement systems can operate in conjunction with a connected PC (via Ethernet) for setup, data storage and visualization, or in autarkic stand alone mode. In case of power outages, full data integrity on the built-in Flash removable memory volume is ensured by means of UPS buffering, which ensures the safe termination and storage of all open measurement data files.

All C-SERIES-FD devices come standard with two CAN interfaces, which can be operated both in standard-CAN mode and in extended CAN FD configuration (FD: flexible Data Rate with an extended data rate of up to 8 Mbaud). Since the operation mode can be software-configured separately for each node, the user benefits from a maximum flexibility and 100% backward compatibility with predecessor models such as the C-SERIES-N.

Highlights

- Integrated CAN FD-Interface
- Real-time signal processing and closed loop control and test automation with imc Online FAMOS
- Counter inputs (measurement of RPM, speed, angle, time, events etc.)
- Digital inputs and outputs
- Analog outputs (DAC)
- Data storage to onboard flash media (CF card) or network harddrive (NAS etc.)
- Complex triggering system, PC independent
- Optional internal WiFi (WLAN) adaptor
- Supports platform independent remote access via standard internet browser (optionally integrated imc REMOTE Webserver)
- Networking (TCP/IP) and synchronizable with other imc measurement systems via:
 - isolated Sync-Signal (DCF-77, IRIG-B)
 - network based via NTP
 - GPS
- Measurement channel extension via direct connection of CAN based measurement modules of the imc CANSAS series
- In conjunction with the operating software imc STUDIO the devices are immediately ready to take measurements with all functionality supported.


Overview of the available CS-7008 devices

Order code	article no.	housing	analog channels	properties
CS-7008-FD	1400118	CS alu profile	8	CAN FD and Super-Cap UPS
CS-7008-FD-ET	1410053			for extended temperature range

Extra option (factory order option)

- Internal WiFi-adaptor

Mechanical drawings with dimensions

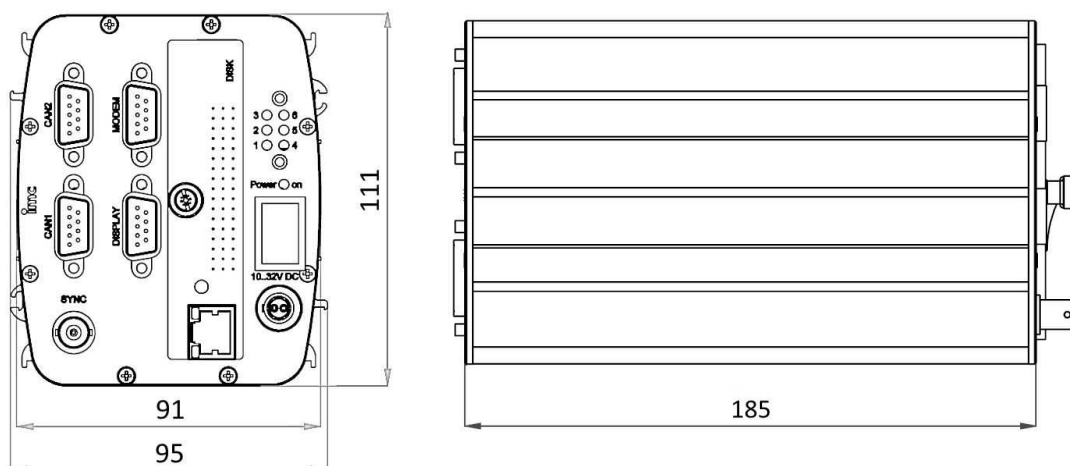

CS device shown in standard operating orientation.

Software minimum requirements

Operation of the "FD" series devices requires operating software of the following group: imc STUDIO 5.0 R9 associated with firmware and driver package imc DEVICES 2.9 R6.

Accessories and Connectors

Included accessories

- Calibration certificate with test equipment verification as per ISO 9001 (manufacturer's calibration certificate)
- Instruction manual: "Getting started with devices of the C-SERIES"
- 1x Ethernet network cable with latch protection (uncrossed, 2 m)
- 1x LEMO.1B plug (ACC/POWER-PLUG1)

AC/DC power adaptor 110-230V AC (with appropriate LEMO plug)		
CRPL/AC-ADAP-60W-1B	24 V DC, 60 W, LEMO.1B.302	1080066
DSUB-15 plug		
4x ACC/DSUB-UNI2	DSUB-15 plug with screw terminals for 2-channel current- ¹ , voltage- and bridge measurement as well as temperatures with PT100 and thermocouples with integrated cold junction compensation (CJC)	1350166
1x ACC/DSUB-DI4-8	DSUB-15 plug for 8 digital inputs	1350174
1x ACC/DSUB-DO4	DSUB-15 plug for 8 digital outputs	1350173
1x ACC/DSUB-ENC4	DSUB-15 plug for 4 incremental inputs	1350171
1x ACC/DSUB-DAC4	DSUB-15 plug for 4 analog outputs	1350177

Optional accessories

DSUB-15 plug		
ACC/DSUBM-I2	DSUB-15 plug for 2-channel current measurement (20 mA)	1350180
ACC/DSUBM-ICP2I-BNC	DSUB-15 plug for 2 IEPE/ICP sensors, BNC connection, isolated	1350199
Mounting brackets for fixed installations		
C/CS-BRACKET-90	mounting bracket 90°; mounting CS devices on a flat surface	1400064
C/CS-19"-RACK	19" RACK for up to 4 CS devices	1400091
Miscellaneous		
C/CAL-P	Calibration report set for imc C-SERIES Report set with manufacturer's calibration certificate and individual readings, as well as list of test equipment used. Meets requirements of DIN EN ISO 17025.	1400035

Further accessories (see separate price list of the accessories)

- recommended and verified removable flash storage media
- external display (via DSUB-9)
- GPS-receiver (with DSUB-9 connection)

¹ Single-ended current measurement, for differential measurement an external shunt or the appropriate connector (ACC/DSUBM-I2) is necessary

General Technical Specs

Terminal connection		
Parameter	Value	Remarks
Terminal connection universal analog input	4x DSUB-15	8 analog inputs
Terminal connection DI, DO, INC, DAC	1x DSUB-15 1x DSUB-15 1x DSUB-15 1x DSUB-15	8 digital inputs 8 digital outputs 4 counter inputs 4 analog outputs
Further terminal connection	RJ45 CF-Card Slot 2x DSUB-9 DSUB-9 DSUB-9 BNC LEMO FGG.1B.302	Ethernet (100 MBit), PC/network removable storage two CAN FD nodes external display external GPS module synchronization supply
Weight	ca. 2 kg	
Dimensions (WxHxD) in mm	95 x 111 x 185	
Power supply		
Parameter	Value	Remarks
Power supply	10 V to 32 V DC	
Isolation of supply input	non-isolated	
AC/DC adaptor	110 V to 230 V AC	external adaptor included in delivery
Auto start upon power up	configurable	automatic start of measurement
UPS and Data integrity		
Parameter	Value	Remarks
Autarkic operation without PC	✓	
Self start (automatic data acquisition operation)	configurable	timer, absolute time, automatic start when power supply is available
Auto data-saving upon power outage	✓	buffering (UPS) with "auto-stop": auto-stop of measurement, data storage and automatic shutdown
UPS	integrated	Super-Caps
Charging time of the Super-Caps	6 min.	minimum required active operation for full UPS functionality
UPS coverage	entire device	
UPS delay per power outage	1 sec	"buffer time constant": required duration of a continuous outage that will trigger auto shutdown procedure fix parameter: not changeable in device configuration!
Effective buffer capacity	100 mWh	sufficient for auto-stop (max. 12 sec.); with fully charged Super-Caps (after minimum operating duration)

Data acquisition, trigger		
Parameter	Value	Remarks
Max. aggregate sampling rate	400 kS/s	
Channel individual sampling rates	selectable in 1–2–5 steps	
Number of sampling rates: analog channels, DI and counter	2	usable simultaneously in one configuration
Number of sampling rates: fieldbus channels	arbitrary	
Number of sampling rates: virtual channels	arbitrary	data rates generated via imc Online FAMOS (e.g. via reduction)
Monitor channels	✓ for all channels of the types: analog, DI and counter (incremental encoder) and CAN	doubled channels with independent sampling and trigger settings
Intelligent trigger functions	✓	e.g. logical combination of multiple channel events (threshold, edge) to create triggers that start and stop acquisition of assigned channels
Multi.triggered data acquisition	✓	multiple trigger-machines and multi-shot
Independent trigger-machines	48	start/stop, arbitrary channel assignment
Direct onboard data reduction: arithmetic mean, min, max.	✓	
Extensive real-time calculation and control functions	✓	included in standard delivery (via imc Online FAMOS)
External GPS signal receiver	0	
Internal WiFi (WLAN) adaptor	0 IEEE 802.11g (1 antenna) max. 54 MBit/s	

Storage, signal processing		
Parameter	Value	Remarks
Internal flash storage	CF-card	removable cover for the CF slot
Removable flash storage media	CF	recommended media available at imc; the specified operating temperature range of the media is relevant
Storage on NAS (network storage)	✓	alternatively to onboard Flash storage
Arbitrary memory depth with pre- and post trigger	✓	maximum pretrigger limited by size of Circular Buffer RAM; posttrigger only limited by available mass storage (Flash)
Circular buffer mode	✓	cyclic overwrite of circular buffer memory on mass storage media
Synchronization	DCF 77 GPS IRIG-B NTP	Master / Slave via external GPS-receiver TTL via network

Operating conditions		
Operating environment (Standard)	dry, non corrosive environment within specified temperature range	
Ingress Protection	IP20	
Operating temperature (Standard)	-10°C to 55°C	without condensation
Operating temperature (extended, "-ET")	-40°C to 85°C	condensation temporarily allowed
Rel. humidity	80% up to 31°C, above 31°C: linear declining to 50%, according DIN EN61010-1	
Operating altitude	up to 2000 m	
Shock and vibration resistance	IEC 60068-2-27, IEC 60068-2-64 IEC 61373 category 1, class A and B	
Extended shock and vibration resistance (Upon request)	MIL-STD-810 Rail Cargo Vibration Exposure U.S. Highway Truck Vibration Exposure	

Synchronization and time base

Time base of individual device without external synchronization			
Parameter	Value typ.	min. / max.	Remarks
Accuracy RTC		±50 ppm 1 µs (1 ppm)	not calibrated (standard devices), at 25°C calibrated devices (upon request), at 25°C
Drift	±20 ppm	±50 ppm	-40°C to +85°C operating temperature
Ageing		±10 ppm	at 25°C; 10 years

Time base of individual device with external synchronization signal				
Parameter	GPS	DCF77	IRIG-B	NTP
Supported formats	NMEA / PPS ⁽¹⁾		B000, B001 B002, B003 ⁽²⁾	Version ≤4
Precision	±1 µs			<5 ms after ca. 12 h ⁽³⁾
Jitter (max.)	±8 µs			
Voltage level	TTL (PPS) RS232 (NMEA)	5 V TTL level		---
Input impedance	1 kΩ (pull up)	20 kΩ (pull up)		---
Input connection	DSUB-9 "GPS" not isolated	BNC "SYNC" (isolated) (test voltage: 300 V, 1 min.)		RJ45 "LAN"
Cable shield connection		BNC: isolated Signal-GND (marked with yellow ring)		---

Synchronization of multiple devices via DCF (Master/Slave)			
Parameter	Value typ.	min. / max.	Remarks
Max. cable length		200 m	BNC cable type RG58 (propagation delay of cable needs to be considered)
Max. number of devices		20	only slaves
Common mode SYNC not-isolated	0 V		with non-isolated BNC connector: devices must have the same ground voltage level, otherwise signal integrity issues (signal artifacts and noise) may result
SYNC isolated		max. 50 V	with isolated BNC connector: SYNC-signal is already internally isolated, for reliable operation even with different ground voltage level (ground loops)
Voltage level	5 V		
DCF input/output	"SYNC" connection		BNC

- (1) PPS (Pulse per second): signal with an impulse >5 ms is necessary
- (2) using BCD information only
- (3) Max. value, concerning the following condition: first-synchronization

CS-7008-FD analog inputs

Inputs, measurement modes		
Parameter	Value	Remarks
Inputs	8	
Measurement modes	voltage measurement current measurement thermocouple measurement bridge sensor strain gauge PT100 (3- and 4-wire configuration) current-fed sensors (IEPE/ICP)	ACC/DSUBM-UNI2 Single-ended (internal shunt) or shunt plug ACC/DSUBM-I2 full, half, quarter bridge with DSUB-15 extension plug: ACC/DSUBM-ICP2I-BNC, isolated

Sampling rate, Bandwidth, Filter, TEDS		
Parameter	Value	Remarks
Sampling rate	≤ 100 kHz	per channel
Bandwidth	0 Hz to 48 kHz 0 Hz to 30 kHz 0 Hz to 10 Hz	-3 dB -0.1 dB -3 dB for temperature measurement
Filter (digital) cut-off frequency characteristic type and order	10 Hz to 20 kHz	Butterworth, Bessel low pass or high pass filter: 8th order band pass: LP 4th and HP 4th order Anti-aliasing filter: Cauer 8th order with $f_{\text{cutoff}} = 0.4 f_s$
Resolution	16 Bit	internal processing 24 Bit
TEDS Transducer Electronic Data Sheets	conforming to IEEE 1451.4 Class II MMI	ACC/DSUBM-TEDS-xxx
Characteristic curve linearization	user defined (max. 1023 supporting points)	

General			
Parameter	Value typ.	min. / max	Remarks
Overvoltage protection		± 80 V ± 50 V	permanent, differential range $> \pm 10$ V and device off range $\leq \pm 10$ V
Input coupling	DC		
Input configuration	differential		
Input impedance	1 M Ω 20 M Ω		range $> \pm 10$ V range $\leq \pm 10$ V
Auxiliary supply			for IEPE/ICP-extension plug
voltage	+5 V	$\pm 5\%$	independent of integrated
available current	0.26 A	0.2 A	sensor supply, short-circuit protected
internal resistance	1.0 Ω	< 1.2 Ω	power per DSUB-plug

Voltage measurement			
Parameter	Value typ.	min. / max.	Remarks
Input range	$\pm 50\text{ V}, \pm 25\text{ V}, \pm 10\text{ V}, \pm 5\text{ V}, \pm 2.5\text{ V},$ $\pm 1\text{ V to } \pm 5\text{ mV}$		
Gain error	0.02%	0.05%	of the measured value, at 25°C
Gain drift	$10\text{ ppm/K}\cdot\Delta T_a$	$30\text{ ppm/K}\cdot\Delta T_a$	$\Delta T_a = T_a - 25^\circ\text{C} $ ambient temperature T_a
Offset error	0.02%	0.05% 0.06%	of the range, at 25°C range $> \pm 50\text{ mV}$ range $\leq \pm 50\text{ mV}$
Offset drift	$\pm 40\text{ }\mu\text{V/K}\cdot\Delta T_a$ $\pm 0.7\text{ }\mu\text{V/K}\cdot\Delta T_a$ $\pm 0.1\text{ }\mu\text{V/K}\cdot\Delta T_a$	$\pm 200\text{ }\mu\text{V/K}\cdot\Delta T_a$ $\pm 6\text{ }\mu\text{V/K}\cdot\Delta T_a$ $\pm 1.1\text{ }\mu\text{V/K}\cdot\Delta T_a$	range $> \pm 10\text{ V}$ range $\pm 10\text{ V to } \pm 0.25\text{ V}$ range $\leq \pm 0.1\text{ V}$ $\Delta T_a = T_a - 25^\circ\text{C} $ ambient temperature T_a
Non-linearity	30 ppm	90 ppm	
CMRR (common mode rejection ratio)	80 dB 110 dB 138 dB	$> 70\text{ dB}$ $> 90\text{ dB}$ $> 132\text{ dB}$	DC and $f \leq 60\text{ Hz}$ range $\pm 50\text{ V to } \pm 25\text{ V}$ range $\pm 10\text{ V to } \pm 50\text{ mV}$ range $\pm 25\text{ mV to } \pm 5\text{ mV}$
Noise	$3.6\text{ }\mu\text{V}_{\text{rms}}$ $0.6\text{ }\mu\text{V}_{\text{rms}}$ $0.14\text{ }\mu\text{V}_{\text{rms}}$	$5.5\text{ }\mu\text{V}_{\text{rms}}$ $1.0\text{ }\mu\text{V}_{\text{rms}}$ $0.26\text{ }\mu\text{V}_{\text{rms}}$	range 0.1 Hz to 50 kHz range 0.1 Hz to 1 kHz range 0.1 Hz to 10 Hz

Current measurement with shunt plug			
Parameter	Value typ.	min. / max.	Remarks
Input range	$\pm 50\text{ mA}, \pm 20\text{ mA}, \pm 10\text{ mA}, \pm 5\text{ mA},$ $\pm 2\text{ mA}, \pm 1\text{ mA}$		
Shunt impedance	50 Ω		external plug ACC/DSUBM-I2
Over load protection		$\pm 60\text{ mA}$	permanent
Input configuration	differential		
Gain error	0.02%	0.06% 0.1%	of the reading, at 25°C additional error of 50 Ω in plug
Gain drift	$15\text{ ppm/K}\cdot\Delta T_a$	$55\text{ ppm/K}\cdot\Delta T_a$	$\Delta T_a = T_a - 25^\circ\text{C} $ ambient temperature T_a
Offset error	0.02%	0.05%	of the range, at 25°C
Noise	$40\text{ nA}_{\text{rms}}$ $0.7\text{ nA}_{\text{rms}}$ $0.17\text{ nA}_{\text{rms}}$	$70\text{ nA}_{\text{rms}}$ $12\text{ nA}_{\text{rms}}$ $0.3\text{ nA}_{\text{rms}}$	Bandwidth: 0.1 Hz to 50 kHz 0.1 Hz to 1 kHz 0.1 Hz to 10 Hz

Current measurement with internal shunt			
Parameter	Value typ.	min. / max.	Remarks
Input range	$\pm 50 \text{ mA}$, $\pm 20 \text{ mA}$, $\pm 10 \text{ mA}$, $\pm 5 \text{ mA}$, $\pm 2 \text{ mA}$, $\pm 1 \text{ mA}$		
Shunt impedance	120 Ω		internal
Over load protection		$\pm 60 \text{ mA}$	permanent
Input configuration	Single-ended		internal current sink to -VB
Gain error	0.02%	0.06%	of the reading, at 25°C
Gain drift	15 ppm/K· ΔT_a	55 ppm/K· ΔT_a	$\Delta T_a = T_a - 25^\circ\text{C} $ ambient temperature T_a
Offset error	0.02%	0.05%	of the range, at 25°C
Noise	40 nA _{rms} 0.7 nA _{rms} 0.17 nA _{rms}	70 nA _{rms} 12 nA _{rms} 0.3 nA _{rms}	Bandwidth: 0.1 Hz to 50 kHz 0.1 Hz to 1 kHz 0.1 Hz to 10 Hz

Bridge measurement			
Parameter	Value typ.	min. / max.	Remarks
Mode	DC		
Measurement modes	full, half, quarter bridge		bridge supply $\leq 5 \text{ V}$ with quarter bridge
Input range	$\pm 1000 \text{ mV/V}$, $\pm 500 \text{ mV/V}$, $\pm 200 \text{ mV/V}$, $\pm 100 \text{ mV/V}$ with bridge supply: 10 V ... $\pm 0,5 \text{ mV/V}$ with bridge supply: 5 V ... $\pm 1 \text{ mV/V}$ with bridge supply: 2.5 V ... $\pm 2 \text{ mV/V}$ with bridge supply: 1 V ... $\pm 2 \text{ mV/V}$		(as an option) (as an option)
Bridge supply	10 V 5 V (as an option) 2.5 V and 1 V	$\pm 0.5\%$ $\pm 0.5\%$	The actual value will be dynamically captured and compensated for in bridge mode.
Minimum bridge impedance	120 Ω full bridge 60 Ω half bridge		
Maximum bridge impedance	5 k Ω		
Quarter bridge completion	120 Ω , 350 Ω		internal, switchable per software
Input impedance	20 M Ω	$\pm 1\%$	differential, full bridge
Gain error	0.02%	0.05%	of the reading, at 25°C
Gain drift	20 ppm/K· ΔT_a	50 ppm/K· ΔT_a	$\Delta T_a = T_a - 25^\circ\text{C} $ ambient temperature T_a
Offset error	0.01%	0.02%	of input range, at 25°C, after automatic bridge balancing
Automatic shunt-calibration (calibration jump)	0.5 mV/V	$\pm 0.2\%$	for 120 Ω and 350 Ω

Temperature measurement - Thermocouples			
Parameter	Value typ.	min./ max.	Remarks
Measurement mode	J, T, K, E, N, S, R, B		
Measurement range	-270°C to 1370°C -270°C to 1100°C -270°C to 500°C		type K
Resolution	0.063 K (1/16 K)		16-Bit integer
Measurement error		0.06% 0.05%	type K of measurement range, at 25°C of reading (total uncertainty min. 0.85 K)
Drift	0.02 K/K·ΔT _a	0.05 K/K·ΔT _a	ΔT _a = T _a - 25°C ambient temperature T _a
Error of cold junction compensation		±0.15 K	with ACC/DSUBM-UNI2, at 25°C
Cold junction drift	±0.001 K/K·ΔT _a		ΔT _a = T _a - 25°C ambient temperature T _a

Temperature measurement - PT100			
Parameter	Value typ.	min. / max.	Remarks
Input range	-200°C to 850°C -200°C to 250°C		
Resolution	0.063 K (1/16 K)		
Measurement error		0.25 K 0.02% 0.1 K 0.02%	4-wire measurement: -200°C to 850°C of reading -200°C to 250°C of reading
Drift		0.01 K/K·ΔT _a	ΔT _a = T _a - 25°C ambient temperature T _a
Sensor feed (PT100)	1.25 mA		

Sensor supply				
Parameter	Value			Remarks
Configuration options	5 selectable settings			The sensor supply module always has 5 selectable voltage settings. default selection: +5 V to +24 V
Output voltage	Voltage	Current	Power	set jointly for all eight channels optional, special order: +12 V or +15 V can be replaced by +2.5 V preferred selection with 2.5 V: +2.5 V, +5.0 V, +10 V, +12 V, +24 V optional, special order: +15 V can be replaced by ± 15 V. This eliminates the internal current- and quarter bridge measurement.
	+1 V	580 mA	0.6 W	
	+2.5 V	580 mA	1.5 W	
	+5.0 V	580 mA	2.9 W	
	+10 V	300 mA	3.0 W	
	+12 V	250 mA	3.0 W	
	+15 V	200 mA	3.0 W	
	+24 V	120 mA	2.9 W	
	(± 15 V)	190 mA	3.0 W	
Short-circuit protection	unlimited duration			to output voltage reference ground: "-VB"
Accuracy of output voltage	<0.25% (typ.) / <0.5% (max.) <0.9% (max.)			at terminals, no load at 25°C over entire temperature range
Compensation of cable resistances	3-line control: SENSE line as refeed (-VB: supply ground)			calculated compensation with bridges
Max. capacitive load	>4000 μ F >1000 μ F >300 μ F			2.5 V to 10 V 12 V, 15 V 24 V

Technical Specs: Features (for all devices of imc C-SERIES)

Digital Inputs

Parameter	Value	Remarks
Channels	8	common ground reference for each 4-channel group, isolated from the other input group
Configuration options	TTL or 24 V input voltage range	configurable at the DSUB globally for 8 Bits: <ul style="list-style-type: none"> • jumper from LCOM to LEVEL: activates TTL-mode • LEVEL unconnected: activates 24 V-mode
Sampling rate	10 kHz	
Isolation strength	± 50 V	tested ± 200 V isolated to system ground, supply and channel-to-channel
Input configuration	differential	
Input current	max. 500 μ A	
Switching threshold	1.5 V (± 200 mV) 8 V (± 300 mV)	5 V level 24 V level
Switching time	<20 μ s	

Parameter	Value	Remarks
Supply HCOM	5 V max. 100 mA	electrically isolated from system (case), Configuration signal "LEVEL" is referenced to HCOM, LCOM
Terminal connection	DSUB-15	ACC/DSUBM-DI4-8

Digital outputs

Parameter	Value	Remarks										
Channels / bits	8 bit	Group of 8 bits, galvanically isolated; common reference potential ("LCOM") for each group										
Isolation strength	± 50 V	to system ground (case, CHASSIS)										
Output configuration	totem pole (push-pull) or open-drain	configurable at the DSUB globally for 8 Bits: <ul style="list-style-type: none"> • jumper from OPDRN to LCOM: totem pole • OPDRN unconnected: open-drain 										
Output level	TTL or max. $U_{\text{ext}} - 0.8$ V	internal, galvanically isolated supply voltage by connecting an external supply voltage U_{ext} with "HCOM", $U_{\text{ext}} = 5$ V to 30 V										
State upon system power up	high impedance (High-Z)	Independent of output configuration (OPDRN-pin)!										
Activation of the output stage following system start	upon first preparation of measurement	with initial states which can be selected in the experiment (High / Low) in the selected output configuration (OPDRN-pin)										
Max. output current (typ.) TTL 24 V-logic open-drain open-drain with intern. 5 V supply	<table border="1"> <thead> <tr> <th>HIGH</th> <th>LOW</th> </tr> </thead> <tbody> <tr> <td>15 mA</td> <td>0.7 A</td> </tr> <tr> <td>22 mA</td> <td>0.7 A</td> </tr> <tr> <td>---</td> <td>0.7 A</td> </tr> <tr> <td></td> <td>160 mA</td> </tr> </tbody> </table>	HIGH	LOW	15 mA	0.7 A	22 mA	0.7 A	---	0.7 A		160 mA	external clamp diode needed for inductive load for all outputs
HIGH	LOW											
15 mA	0.7 A											
22 mA	0.7 A											
---	0.7 A											
	160 mA											
Output voltage TTL 24 V-logic ($U_{\text{ext}} = 24$ V)	<table border="1"> <thead> <tr> <th>HIGH</th> <th>LOW</th> </tr> </thead> <tbody> <tr> <td>>3.5 V</td> <td>≤ 0.4 V</td> </tr> <tr> <td>>23 V</td> <td>≤ 0.4 V</td> </tr> </tbody> </table>	HIGH	LOW	>3.5 V	≤ 0.4 V	>23 V	≤ 0.4 V	for load current: $I_{\text{high}} = 15$ mA, $I_{\text{low}} \leq 0.7$ A $I_{\text{high}} = 22$ mA, $I_{\text{low}} \leq 0.7$ A				
HIGH	LOW											
>3.5 V	≤ 0.4 V											
>23 V	≤ 0.4 V											
Internal supply voltage	5 V, 160 mA (isolated)	available at terminals										
Switching time	<100 μ s											
Terminal connection	DSUB-15	ACC/DSUBM-DO8										

Incremental encoder channels

Parameter	Value		Remarks
Channels	4 + 1 (5 tracks)		four single-tracks or two two-track channels one index track
Measurement modes	Displacement, Angle, Events, Time, Frequency, Velocity, RPMs		
Sampling rate	50 kHz		per channel
Time resolution of measurement	31.25 ns		Counter frequency: 32 MHz
Data resolution	16 bits		
Input configuration	differential		
Input impedance	100 k Ω		
Input voltage range	± 10 V		(differential)
Common mode input range	min. -11 V	max. +25 V	
Switching threshold	-10 V to +10 V		detection level selectable per channel
Hysteresis	min. 100 mV		selectable per channel
Analog bandwidth	500 kHz		-3 dB (full power)
Analog filter	Bypass (no Filter), 20 kHz, 2 kHz, 200 Hz		selectable (per-channel) 2 nd order Butterworth
Switching delay	500 ns		signal: 100 mV squarewave
CMRR	70 dB 60 dB	50 dB 50 dB	DC, 50 Hz 10 kHz
Gain error	<1 %		of input voltage range @ 25 °C
Offset error	<1 %		of input voltage range @ 25 °C
Overvoltage strength	± 50 V		to system ground
Sensor supply	+5 V, 300 mA		not isolated (reference: GND, CHASSIS)
Terminal connection	DSUB-15		ACC/DSUBM-ENC4

Analog outputs

Parameter	Value typ.	min. / max.	Remarks
Channels	4		
Output level	±10 V		
Load current	max. ±10 mA / channel		
Resolution	16 Bit		15 Bit no missing codes
Non-linearity	±2 LSB	±3 LSB	
Max. output frequency	50 kHz		
Analog bandwidth	50 kHz		-3 dB, low pass 2. order
Gain error	<±5 mV	<±10 mV	-40 °C to 85 °C
Offset error	<±2 mV	<±4 mV	-40 °C to 85 °C
Terminal connection	DSUB-15		ACC/DSUBM-DAC4

CAN FD Bus Interface

Parameter	Value	Remarks
Number of CAN-nodes	2	one galvanically isolated node per connector
Terminal connection	2x DSUB-9	
Topology	bus	
Transfer protocol	configurable per software: CAN FD (ISO Standard) (max. 8 MBaud) non-ISO CAN FD (Draft) (max. 8 MBaud) CAN High Speed (max. 1 MBaud) CAN Low Speed (max. 125 KBaud)	individually for each node current standard according ISO 11898-1:2015 former draft (Bosch) according ISO 11898 according ISO 11519
Operating mode	Multi Master principle	
Direction of data flow	sending and receiving	
Baud rate	5 kBit/s to 8 MBit/s	configurable via software; maximum is depending on selected protocol (FD/High/Low Speed)
Termination	120 Ω	switchable by software for each node
Isolation strength	60 V	to system ground (case, CHASSIS)
Direct access for configuration of imc CANSAS modules	yes	via the CAN node of the device with imc STUDIO (CAN High Speed Mode only)